Environmentally friendly photosensitive sensor

Product specifications

O Customer	
Date	
Model	LS07-A F3
Product number	

Make	
Approval	
O Customer Signatures	

Sales center
Address: 32nd Floor,Tower T3,One Excellence,No.5109Menghai Avenue,Nanshan District, Shenzhen, China
Website www.nysenba.com
Tel 86-755-82594756 18929323299
Fax 86-755-82594762

森霸传感科技股份有限公司

■ ƍ
Product function

1. (CdS) Ƈ ROHS

■ Product Dimensions

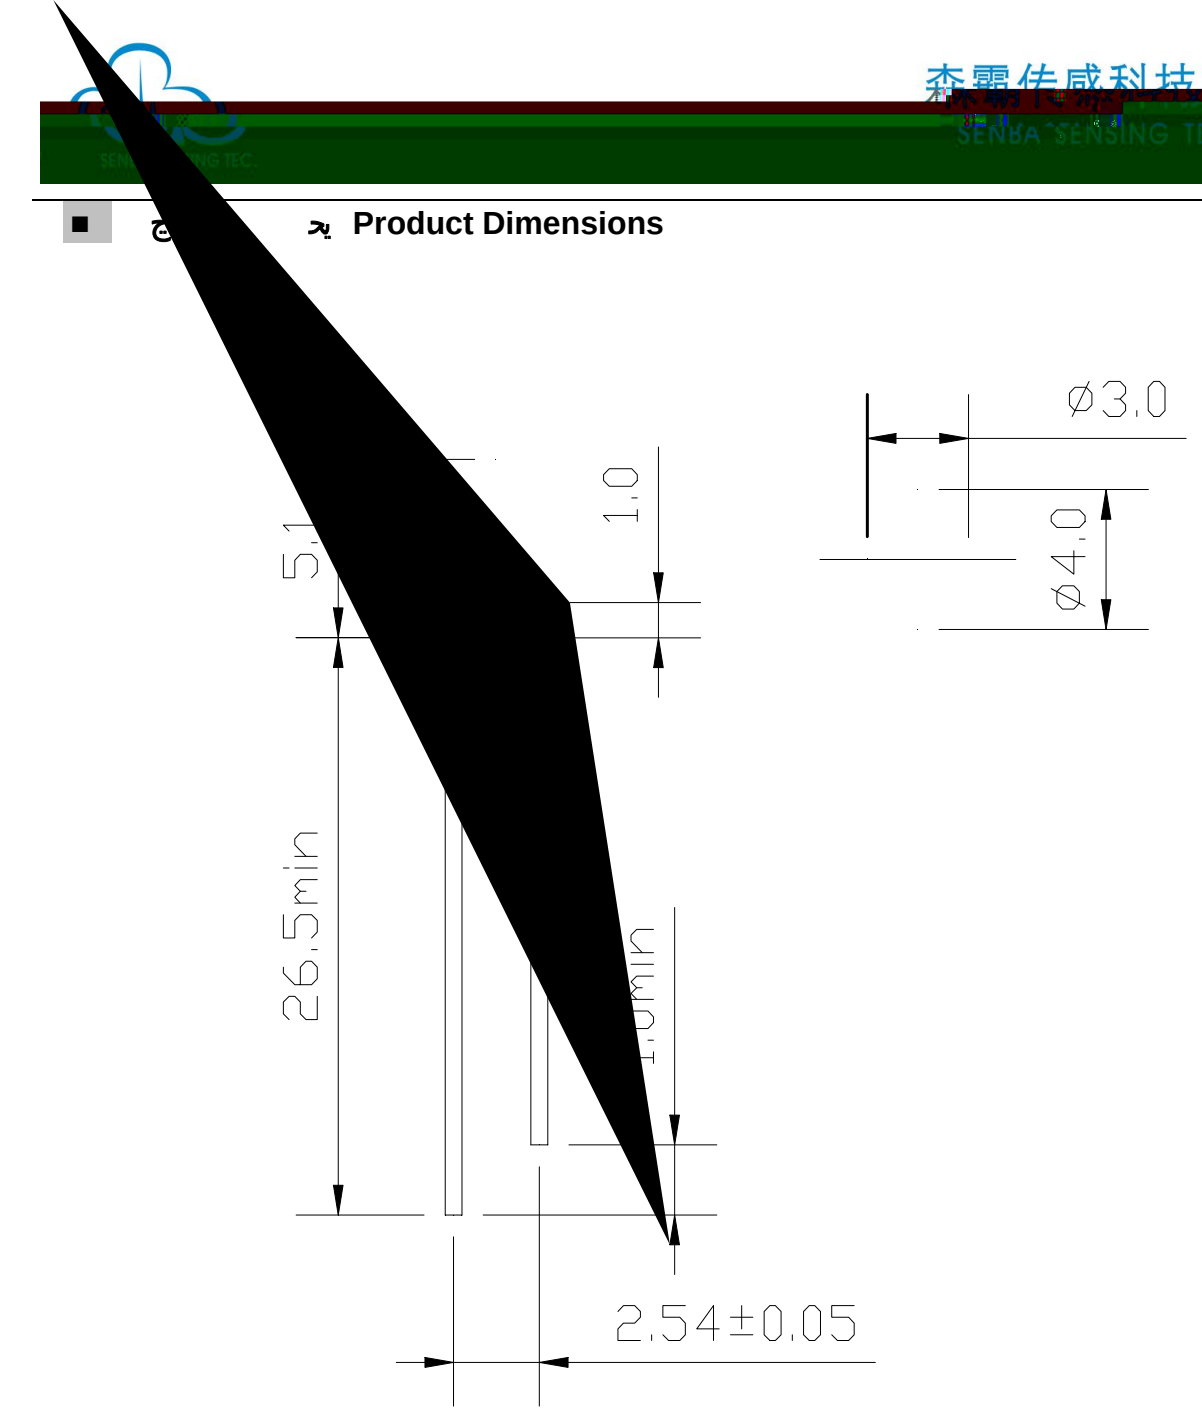

■ ₹ T" ή 1 ב

■ **Refec**

■ Typical photoelectric characteristic

■ Reliability Test

Test Parameter	Reference Criterion	Test Condition	Time	Quantity	Ac/RE
Resistance to Solder Heat	JESD22-B106	260 Ñ5	10sec	30PCS	0/1
Thermal Cycle	JESD22-A104	110 (15min) 5min - 15 (15min)	50 cycles	30PCS	0/1
Thermal Shock	JESD22-A104	120 (30min) - 45 (30min)	50 cycles	30PCS	0/1
High Temprature storage	JESD22-A103	100	1000H	30PCS	0/1
Low Temperature storage	JESD22-A119	- 40	1000H	30PCS	0/1
High Temperature and High Humidity Test	JESD22-A101	90 85 R.H	168H	30PCS	0/1
Life Test	JESD22-A108	VCE 5V	1000H	30PCS	0/1

森霸传感科技股份有限公司

■ **Recommended Soldering Conditions**

Mode	Condi
Soldering Iron T	340 (pow
Manually Soldering	≤ 3 seconds
	1.5m

■ Precautions

1. ج U 0 +30ÁC 70%
3 ضي
The storage condition of the product after leaving 0 to + 30 Á C, t
relative humidity